

100 kVA

Offloadable Units

- 100 kVA three phase diesel generator
- Custom built offloadable unit, fully bundled
- Perkins engine
- Stand-by application rating of 110kVA
- Prime power rating of 100kVA three phase
- 380 litre fuel tank
- DSE 7410 control panel



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management





Tracking & Telemetry



24/7 Response Team



Disaster Recovery

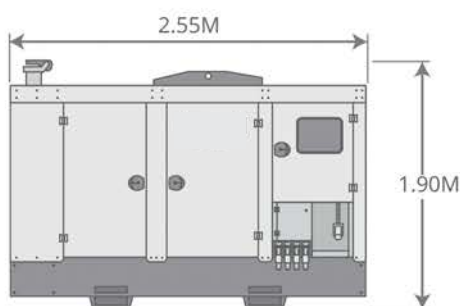

Weight	
Wet Weight	2,606kgs
Dry Weight	1,760kgs

- Custom designed sound attenuated container
- 450 hours service intervals
- Socket outlets- 1 x 125A , 1 x 63A TPN C-Form outlet
- 16A C-Form single-phase auxiliary supply input
- Perkins 1104 engine
- Total output rating 140A per phase
- Full RCD Protection

- Electronic Governing
- Auxiliary winding
- Fuel consumption 171 litres per hour, based on 75% load
- Noise level 76dba @ 1m, based on 75% load
- Alternator type - ECP34

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentonggroup.co.uk