

# 100 kVA Towable

## Offloadable Units

- 100 kVA three-phase diesel generator
- Custom built offloadable unit, fully bunded
- Perkins engine
- Stand-by application rating of 110kVA
- Prime power rating of 100kVA three phase
- 380 litre fuel tank
- DSE 7410 control panel



## 24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



**Remote Fuel Management**





**Tracking & Telemetry**



**24/7 Response Team**



**Disaster Recovery**

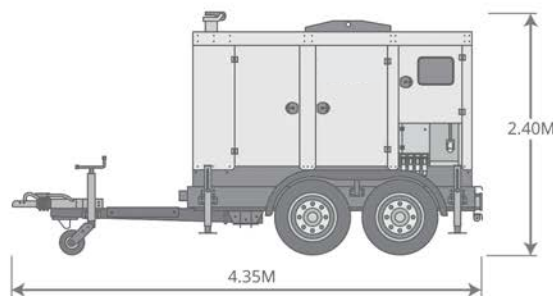

Weight	
Wet Weight	3,086 kgs
Dry Weight	2,246 kgs

- Custom designed sound attenuated container
- 16A C-Form single phase auxiliary supply input
- Full RCD Protection
- 380 litre bunded and baffled fuel tank
- Socket outlets- 1 x 125A & 1 x 63A TPN C-Form outlet sockets
- Perkins 1104 engine
- Output of 140A per phase
- Fuel consumption 171 litres per hour, based on 75% load
- Electronic Governing
- Auxiliary winding
- Noise level 76dba @ 1m, based on 75% load
- 450 hours service intervals

Available 24/7/365  
**Call today to speak to a technical expert**

**0344 888 444 5**  
shentonggroup.co.uk