

200 kVA

Offloadable Units

- 200 kVA three-phase diesel generator
- Custom built offloadable unit, fully bunded
- Cummins engine
- Stand-by application rating 220kVA
- Prime power rating of 200kVA three phase
- DSE 7410 control panel
- 600 litre Fuel tank



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management





Tracking & Telemetry



24/7 Response Team



Disaster Recovery

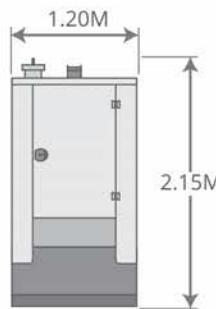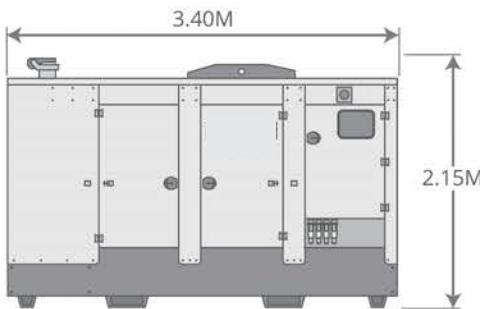

Weight	
Wet Weight	2,900kgs
Dry Weight	2,300kgs

- Custom designed sound attenuated container
- 450 hours service intervals
- 16A C-Form single phase auxiliary supply input
- Full RCD Protection
- 600 litre bunded and baffled fuel tank
- Socket outlets - 2x125A & 1x63A TPN C-Form outlet sockets
- Cummins QSB engine

- Output of 279A per phase
- Fuel consumption 36 litres per hour, based on 75% load
- Electronic Governing
- Auxiliary winding
- Noise level 78dba @ 1m, based on 75% load
- Alternator type - ECO38

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentongroup.co.uk



shentongroup

power with responsibility