

50 kVA

Offloadable Units

- 50 kVA three-phase generator
- Custom built offloadable unit, fully bunded
- Perkins engine
- Prime power rating of 45kVA three phase
- 185 litre Fuel tank
- DSE 7410 control panel



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management





Tracking & Telemetry



24/7 Response Team



Disaster Recovery

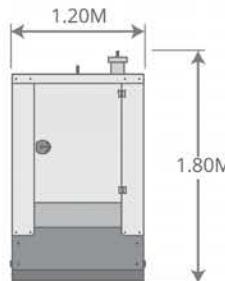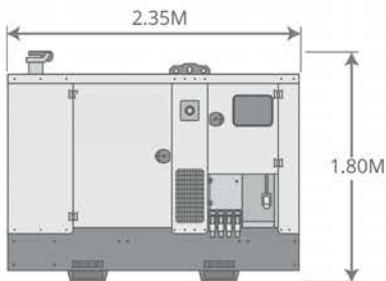

Weight	
Wet Weight	1,355kgs
Dry Weight	1,170kgs

- Custom designed sound attenuated container
- 450 hours service intervals
- 16A C-Form single phase auxilliary supply input
- Full RCD Protection
- 185 litre bunded and baffled fuel tank
- Socket outlets - 1x63A TPN C-Form
- Perkins 1103C engine

- Output of 63A per phase
- Fuel consumption 8 litres per hour, based on 75% load
- Electronic Governing
- Auxiliary winding
- Noise level 76dba @ 1m, based on 75% load
- Alternator type - ECP32

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentongroup.co.uk



shentongroup

power with responsibility