

60 kVA

Offloadable Units

- 60 kVA three-phase generator
- Custom built offloadable unit, fully bunded
- Perkins engine
- Stand-by application rating of 66 kVA
- Prime power rating of 60kVA three phase
- 380 litre Fuel tank
- DSE 7210 control panel



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management





Tracking & Telemetry



24/7 Response Team



Disaster Recovery

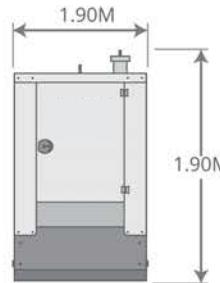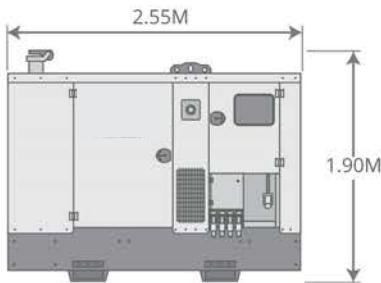

Weight	
Wet Weight	1,640kgs
Dry Weight	1,315kgs

- Custom designed sound attenuated container
- 450 hours service intervals
- 16A C-Form single phase auxilliary supply input
- Full RCD Protection
- 380 litre bunded and baffled fuel tank
- Socket outlets - 4x63A SPN or 2x32A & 1x63A SPN C-Form
- Perkins 1104A-44TG3 engine

- Output of 250A per phase
- Fuel consumption 9.9 litres per hour, based on 75% load
- Electronic Governing
- Shunt excitation system
- Noise level 93dba @ 1m, based on 75% load
- Alternator type - Meccalte ECP34-2-5

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentongroup.co.uk