

Stage V 40 kVA

Offloadable Units

- Ultra low emissions
- 40 kVA three-phase diesel generator
- Fuel Type: Diesel/HVO
- DSE 7310 MK2 control panel
- 200 litre fuel tank
- Off-loadable unit fully bunded to 110%



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management




Tracking & Telemetry



24/7 Response Team



Disaster Recovery

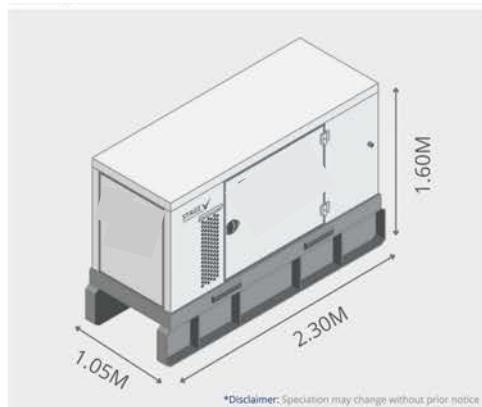

Weight	
Wet Weight	1,461 kgs
Dry Weight	1,321 kgs

- Custom designed sound attenuated container
- 450 hours service intervals
- Socket outlets- 1 x 16/1, 1 x 32/1, 1 x 32/3, 1 x 63/3
- Variable earth leakage protection
- 16A single-phase auxiliary supply input
- Remote start terminals
- Total output rating 57.7A per phase

- Fuel consumption 6.10 litres per hour, based on 75% load
- Sound pressure level (LpA) 66 dB(A) at 7m

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentongroup.co.uk



shentongroup

power with responsibility