

# Stage V 450 kVA

## Offloadable Units

- Ultra low emissions
- 450 kVA three-phase generator
- Fuel Type: HVO/Diesel
- DSE 8610 MK2 control panel
- 1200 litre Fuel tank
- 63 litre Ad Blue tank
- Off-loadable unit fully bunded to 110%



## 24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management




Tracking & Telemetry



24/7 Response Team



Disaster Recovery

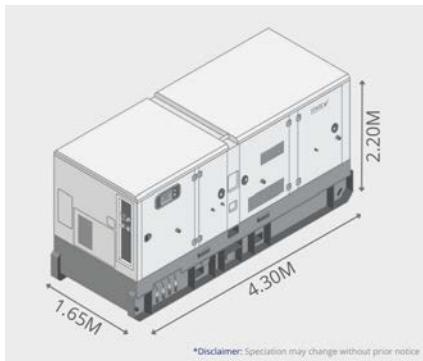

Weight	
Wet Weight	5,972kgs
Dry Weight	4,880kgs

- Custom designed sound attenuated container
- 16A C-Form single phase auxiliary supply input
- Variable earth leakage protection
- Remote start terminals
- Perkins 2500 series engine

- Output of 626A per phase
- Fuel consumption 62.4 litres per hour, based on 75% load
- Electronic Governing
- High speed automatic voltage regulation
- Sound pressure 64dba at 7m
- 450 Hours service intervals

Available 24/7/365  
Call today to speak to a technical expert

0344 888 444 5  
shentongroup.co.uk



shentongroup

power with responsibility