

# Stage V 500 kVA

## Offloadable Units

- Ultra low emissions
- 500 kVA three-phase generator
- Fuel Type: HVO/Diesel
- DSE 8610 MK2 control panel
- 2000 litre Fuel tank
- 160 litre AdBlue tank
- Offloadable unit fully bunded to 110%



## 24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management




Tracking & Telemetry



24/7 Response Team



Disaster Recovery

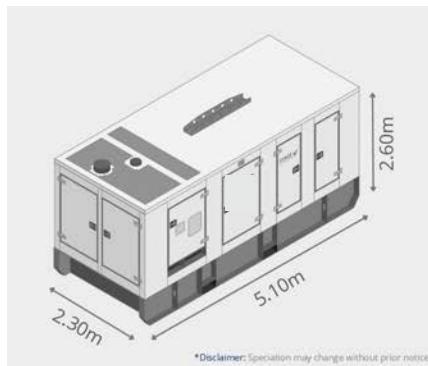

Weight	
Wet Weight	10,200kgs
Dry Weight	8,420kgs

- Custom designed sound attenuated canopy
- 16A single-phase auxiliary supply input Ouput of 679A per phase
- 12mm termination up to 4 cables per phase
- Fuel consumption 82.5 litres per hour, based on 75% load
- Electronic Governing
- High speed automatic voltage regulation
- Noise level 77dba, based on 75% load
- 450 Hours service intervals
- Remote cooling system

Available 24/7/365  
Call today to speak to a technical expert