

CHP Technical Data Sheet for

Micro 20AP Natural Gas Indoor Canopy COMBINED HEAT & POWER



Standard Features

- High performance electrical efficiency
- Fully modulating output
- Compact footprint indoor canopy
- Sophisticated web remote monitoring
- Digital engine management
- Long service intervals
- 27 month warranty
- Standby power options

The Micro series benefits from having Tedom's own built in-house high performance gas engines. Available to run on a variety of gas fuels. Multiple units can be run in synch, and high-end digital controllers make synchronising with the mains simple.

ELECTRICITY OUTPUT	THERMAL OUTPUT	ELECTRIC EFFICIENCY	THERMAL EFFICIENCY	TOTAL EFFICIENCY
20kWe	42kWt	30.5%	64.0%	94.5%

shentongroup has the exclusive distributorship for Tedom products in the UK, Ireland and Channel Islands.

We provide dedicated services for CHP projects, ranging from design assistance, through project management, to commissioning and long-life support.

Tedom is a global CHP manufacturer with 600 employees. There are over 2,000 tedom CHP units in service in over 35 countries



Basic Characteristics

CHP units Micro series are plants for the combined production heat and power in terms of gas combustion. Basic properties of CHP unit of Micro series are: high efficiency, compactness, long life-time of oil filling and service interval. Due to all mentioned characteristics these products are used as modern power sources for heating of small buildings.

According to statement of notified body certificate certifying conformaty of series

Micro products withrequests of directive 2009/142/EC (government regulation no.22/2003 Col.) was edited.TEDOM company is a holder of certificate QMS and EMS



Basic Technical Data

Unit description:

Unit is intended for natural gas combustion, AP – equipped with asynchronous generator working in parallel with mains.

Design	Standard			With condenser	
	load	75	50	100	%
nominal electrical output	20	15	10	20	kW
maximal heat output ¹⁾	42.0	34	29	48.2	kW
fuel input	65.5	52	41.6	146	kW
electrical efficiency	30.5	28.8	24.0	30.5	%
heat efficiency	64.0	65.3	69.9	73.6	%
total efficiency (fuel use)	94.5	94.1	93.9	104.4 ²⁾	%
gas consumption	6.9	5.5	4.4	6.9	m ³ /h

*Basic technical data are valid for standard conditions according to the document „Technical instructions“
Requested min. continuing electric output is 50% of nominal output
Gas consumption is mentioned at invoicing conditions (15°C, 101,325 kPa) Technical data are specified for temperatures 65/85°C
Gas consumption tolerance, or fuel input tolerance, at 100% load is +5%
Tolerances of other parameters are mentioned in "Technical Instructions-Validity of Technical Data" document.
1) Maximum heat output is a sum of heat outputs of secondary circuit with exhaust gas cooled to 120°C
2) Valid for return water temperature 35°C*

Emissions


CHP unit satisfies following emission limits

emissions at 5% of O2 in dry exhaust gas	NOx	CO
Standard	50 mg/Nm ³	150 mg/Nm ³

Orientation description of CHP unit

The unit consists of engine-generator set, complete heat equipment, including electro switchboard enabling parallel operation with mains 400V/50Hz. All parts are built in sound silencing enclosure. Warm-water circuits are designed for temperature gradient 20°C.

- 1) generator
- 2) plate exchanger
- 3) exhaust gas exchanger
- 4) oil tank
- 3) exhaust gas exchanger
- 5) connecting points (see last page)
- 6) electric switchboard
- 7) combustion engine

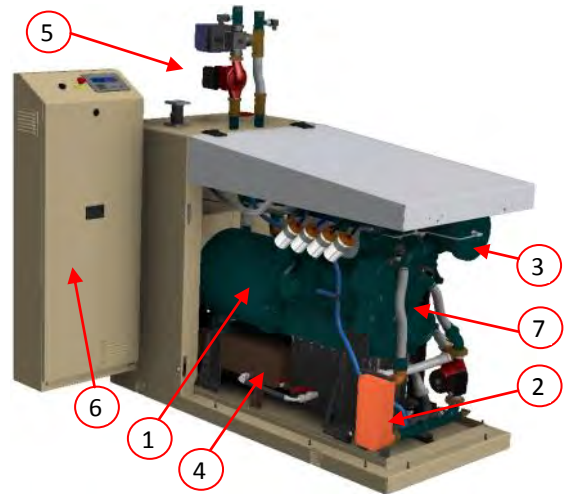

Engine


Unit is driven by gas combustion engine V3800 product of company TEDOM, with basic parameters according to table below:

number of cylinders	4
arrangement of cylinders	in line
bore stroke	100 x 120 mm
displacement	3769 cm ³
compression ratio	13 : 1
speed	1500 min ⁻¹
oil consumption normal/max	0.3/0.6 g/kWh
max. output of engine	36 kW

Generator

Source of electric energy is asynchronous generator AS225, product of company Zanardi, Italy, with basic parameters according to given table:

generator output	32 kW
cos φ	0.81
efficiency in working point	92.9 %
voltage	400 V
frequency	50 Hz

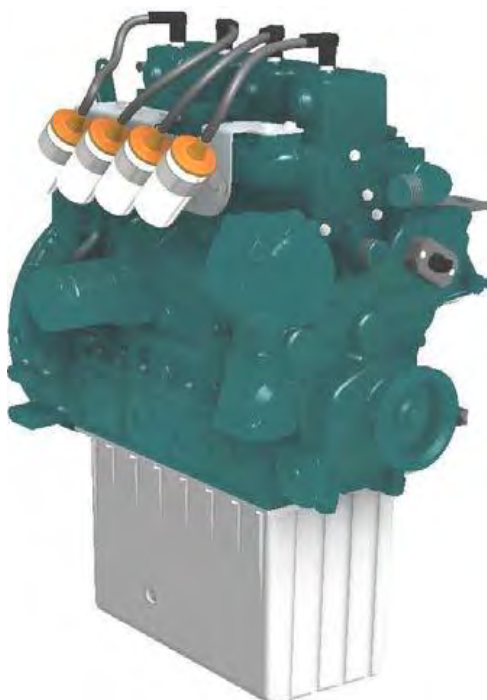

Heating system

Heating system of CHP unit is formed in view of heat output transfer (heat gained by cooling of engine and exhaust gas) by hydraulic circuit, by which is heat from machine transferred to heating system of user. Unit enables operation by different temperatures. Heating system of the unit is equipped by circuit pump.

heating output of circuit	42 kW
nominal flow	0.5 kg/s
max. working pressure	600 kPa
water volume of circuit in CHP unit	25 L
pressure loss at nominal flow ¹⁾	30 kPa
pressure reserve at nominal flow ²⁾	50 kPa
maximal temperature of reversible water	70 °C
min. allowed temperature of reversible water	40 °C
nominal temperature gradient	20 °C

1) if the circuit pump is not used

2) if the circuit pump is used

Fuel, gas inlet

Technical data mentioned in this specification are valid for natural gas with parameters given below.

heating power	34 MJ/m ³
min. methane number	80
gas pressure	2 - 10 kPa
max. change of gas pressure at changes of consumption	10 %
max. temperature	30 °C

Gas line of the unit is composed acc to TPG 811 01 and contains gas filter, combined gas armature, which fulfil following functions:

- double quick-closing electromagnetic valve for gas inlet closing at unit stop.
- gas pressure regulation suitable for mixing.
- elastic connection by metal hose with mixer of engine.

For correct operation of CHP unit is requested gas connection with proper dimension and accumulative volume as a protection against gas pressure drop in system after abrupt changes in consumption. Gas connection must be equipped with hand valve and manometer.

Combustion air, exhaust gas and condensate outlet

Combustion air is sucked from surrounding through cold space of the unit. The exhaust gases are removed from unit by the exhaust piping (duct system) connected on the CHP unit flange. Exhaust piping from unit flange to chimney uptake has to be tight. The piping must be down-grade in the direction from the CHP unit. Eventually, the condensate, which could arise at CHP unit operation is evaporated and blow-off together with exhaust gases. Material of exhaust piping and heat isolation of duct system in machine room must be resistant to temperatures up to 200°C at least. Maximal pressure loss of whole duct system can not exceed 10 mbar. Machine construction does not request any forced ventilation.

quantity of combustion air	62.5 Nm ³ /h
requested temperature of combustion air	10 to 35°C
exhaust gas temperature nominal / max	110/140 °C
max. back-pressure of exhaust gas behind the flange	10 mbar
quantity of exhaust gas	69 Nm ³ /h

Fillings

quantity of lubricating oil in engine	30 L
volume of oil tank	20 L
quantity of cooling liquid in primary circuit	9 L

Noise parameters

Noise parameters specify the level of acoustic pressure, measured in free acoustic field. Specification of measuring places and system of evaluation are according to ČSN 09 0862. The noise contains the tone element with frequency 50 Hz.

sound enclosure of CHP unit in 1 m	60 dB(A)
outlet of exhaust gas in 1m from flange	57 dB(A)

Colour design

engine, generator, internal parts of unit, frame and oil tank	RAL 5001 (blue)
sound enclosure	RAL 1001, 1013 (beige)

Dimensions and weights of unit

length (standard design)	1860 mm
width total	1440 mm
height	1770 mm
operation weight	1100 kg

Consequential documents

dimension drawing: MICRO 20 drawing number R1466E
 obligatory documents according to the document „Technical instructions“

Scope of the delivery

Standard

complete module of CHP unit

Connecting points

