

# **Generator Technical Data Sheet for**

### Model: PHG550Sc



#### GENERATORS AND UPS

- Intelligent Auto-Start
  Controller with Generator
- Monitoring and Protection Systems Suitable for Remote Starting or Connection with shentongroup AMF Panel
- Battery Trickle Charger
- Thermostatically controlled Engine Heater
- Long Range Bunded Base Fuel Tank
- Ability to be Customised to Specific Requirements
- Output Circuit Breaker

#### GENERAL

Shenton Group Generators range from 10 to 2500kVA, and are built to a world-class standard. These remarkably competitive standby generators provide the most cost-effective solution for 'standard package' requirements.

A first-class range of diesel-powered generators for prime and standby power application which feature reliable components from leading manufacturers, these are premium products upon which your company can build its reputation.

Model PHG550Sc		
Standby Power	kVA	550
	kW	440
Prime Power	kVA	500
	kW	400
Rated Speed	r.p.m	1500
Voltage	V	400/230
Rated Power Factor	Cos Phi	0,8
Data Sheet Number		PHG550Sc NS Rev 1

Prime: This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

Standby: This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted. Max rating, is available for one in twelve hours

Note: Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4m (500feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.

In line with our policy of continuous development, we reserve the right to change specification without notice.



## **Generator Technical Data Sheet for**

#### Model: PHG550Sc







ENGINE		
Rated Output	kWm	428
Manufacturer		Scania
Model		DC13 072A 0214
Engine Type		Diesel 4 Strokes-Cycle
Aspiration Type		Turbo charged & intercooled
Cylinders Arrangement		Straight 6
Bore & Stroke	mm	130 x 160
Displacement	L	12.7
Cooling System		Water
Compression Ratio		16.3:1
Fuel Consumption 100% PRP	l/h	98
Fuel Consumption 75% PRP	l/h	70
Fuel Consumption 50% PRP	l/h	47
Total Oil Capacity	L	38
Total Coolant Capacity	L	38
Governor	Туре	Electronic
Air Filter	Туре	Dry Paper Cartridge
Battery Capacity	Ah	2 x 200 Ah
Battery Voltage	V	24

Scania need no introduction as a world class industrial engine manufacturer, producing engines that are designed for high efficiency and exceptional reliability in the most demanding situations globally for maximum uptime. Scania engines have a proven track record that can comfortably be relied on.




GENERATORS AND UPS

## **Generator Technical Data Sheet for**

### Model: PHG550Sc



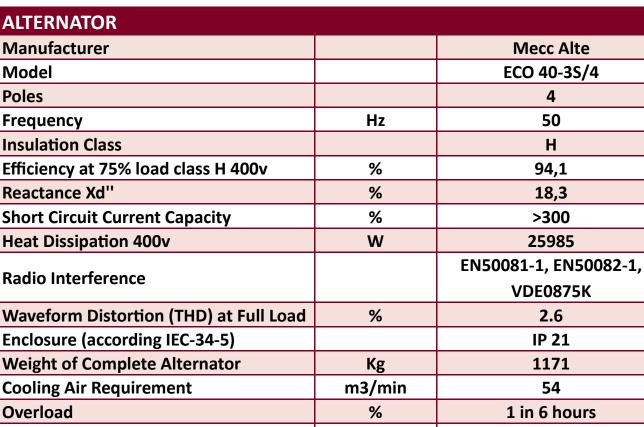

Weight of Complete AlternatorKg1171Cooling Air Requirementm3/min54Overload%1 in 6 hoursOverload per 20 sec%300Exciter System64uxiliary windingVoltage Regulator%1Voltage regulation Performance +/-%1CouplingIFlexible Disk

Mecc Alte has sixty years of experience in the electromechanical field, and is today at its height in the world production of synchronous alternators. Committed daily to research, development and updating activities, Mecc Alte is a testimony to constant improvement in all areas such as technology, organisation and quality. The company has ISO 9001 certification, awarded in 1996 and ISO 14001 since 2010. With 54.000 square meters of factory area, almost 850 employees and a turnover of approximately 130 million euro, Mecc Alte is a well-established company ready to challenge the markets in every product sector.

t. +44 (0)844 888 444 5 e. info@shentongroup.co.uk www.shentongroup.co.uk Shenton House, Walworth Road, Walworth Business Park, Andover, SP10 5LH



**GENERATORS AND UPS** 

# **Generator Technical Data Sheet for**

#### Model: PHG550Sc

### APPLICATION DATA

Exhaust System		
Maximum Exhaust Temperature	°C	563
Exhaust Gas Flow	M3/min	57
Maximum Allowed Back Pressure	kPa	N.A.

Air Flows		
Intake Air Flow	m3/h	1774
Cooling Air Flow	m3/s	10
Available Air Restriction		0

Fuel System		
Fuel Oil Spec		DIESEL
Fuel Tank Capacity	L	1200
Autonomy @ 75% load	Hrs	14

Enclosure Specs		
Length	mm	4800
Width	mm	1450
Height	mm	2432
Wet Weight	Kg	3950
Sound Pressure Level @ 7 mtrs	dB(A)	70

Electrical		
Output Circuit Breaker	Туре	МССВ
	Model	ABB T6N 800A
Full Load Current at 400V .8 p.f.	Amps	793.8



**GENERATORS AND UPS** 

## **Generator Technical Data Sheet for**

### Model: PHG550Sc





#### SG7410DS GENERATOR CONTROLLER

The SG7410DS is an Auto Start Control Module. Monitoring an extensive number of engine parameters, the modules will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs, remote PC. The modules include USB, RS232 and RS485 ports as well as dedicated DSENet<sup>®</sup> terminals for system expansion. The module is compatible with electronic (CAN) and non-electronic (magnetic pick up/alternator sensing) engines and offers an extensive number of flexible inputs, outputs and engine protections so the system can be easily adapted to meet the most demanding industry requirements. The full list of features includes enhanced event and performance monitoring, remote communications and dual mutual standby.

CONTROL PANEL DISPLAY FEATURES		
Engine RPM	Generator Output Current	
Engine Oil Pressure	Earth current	
Coolant temperature	Output kW	
Battery Volts	Load level %	
Run Hours/ No of starts	Output kVA	
Fuel level	Power factor	
Generator output Voltage	Load kVAr	
Frequency	kWh/kVAh/kVArh	

SG7410DS is a branded Deep Sea Electronics controller, customized to shentongroup's specific requirements. shentongroup has a long history of collaboration with Deep Sea Electronics, and endorse their products with confidence. Our experience has proved this is the market-leading controller having a perfect mix of complex capability and user simplicity.