

1250 kVA

40ft Containerised Units

- 1250 kVA three phase diesel generator
- 40FT custom built fully bunded container
- Cummins engine
- Stand-by application rating of 1400 kVA
- Prime power rating of 1250kVA three phase
- 6000 litre fuel tank for 35hr running



24/7 Remote Monitoring

Our 24/7 remote monitoring system connects our fleet of generators directly to our control center, ensuring optimal uptime and scalable performance. This setup also provides engineers and technicians in the field with real-time diagnostic data for efficient troubleshooting and maintenance.

- Daily health check monitoring
- Not-in-auto alarms for standby applications
- Internal and external fuel tank monitoring, including theft detection
- Advanced SCADA instrumentation



Remote Fuel Management





Tracking & Telemetry



24/7 Response Team



Disaster Recovery

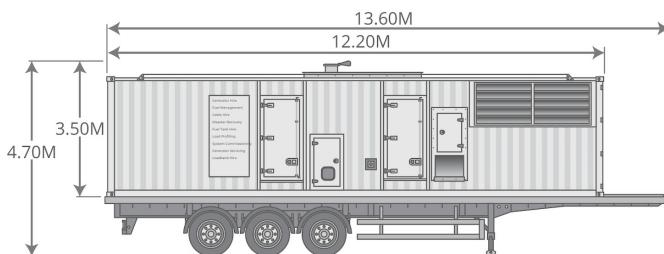

Weight	
Weight Including Trailer	42,900kgs
Weight Excluding Trailer	26,000kgs

- Custom designed sound attenuated container
- 32A C-Form single phase auxiliary supply input
- 4 pole motorised output circuit breaker
- 6,000 litre encapsulated fuel tank with external fill point
- AC/DC Lighting within container
- Connect remote monitoring system
- Cummins KTA50-G3

- Output of 1739A per phase
- 12mm termination up to 10 cables per phase
- Fuel consumption 172 litres per hour, based on 75% load
- Electronic Governing
- High speed automatic voltage regulation
- Noise level 65dba, based on 75% load
- 450 Hours service intervals

Available 24/7/365
Call today to speak to a technical expert

0344 888 444 5
shentongroup.co.uk